

This is a product suitable for projects.  
See all Inpro project references here


# OIL TRANSFER PRESSURE UNITS GP H HIGH PRESSURE SYSTEMS Single Pipe

MODEL		GP-300 H GE	GP-500 H GE	GP-800 H GE	GP-1.500 H GE
FLOW	l/h	300	500	800	1500
CONNECTION TO THE HYDRAULIC CIRCUIT (Ø THREAD / Ø MM)	SUCTION	3/4"	3/4"	1"	1"
	DRIVE	1/2"	1/2"	1/2"	3/4"
POWER SUPPLY	VOLTS	230/400	230/400	230/400	230/400
MOTOR POWER	C.V.	1/2	1/2	3/4	1 <sup>1/2</sup>
	KW	0,25	0,37	0,55	1,1
MAX. PRESSURE	Kg/cm <sup>2</sup>	20	20	20	20
MOTOR PROTECTION	IP	55	55	55	55

\* Also available in 230 V alternating current (WT)  
- Subject to technical changes

MODEL	GP-200 GE	GP-300 GE	GP-500 GE	GP-800 GE	GP-1.500 GE
A	800	800	800	1200	1450
B	720	720	720	970	970
C	370	370	370	500	550
APPROX. WEIGHT (KG)	35,8	41,4	53	89	135

## SUCTION DIAGRAM

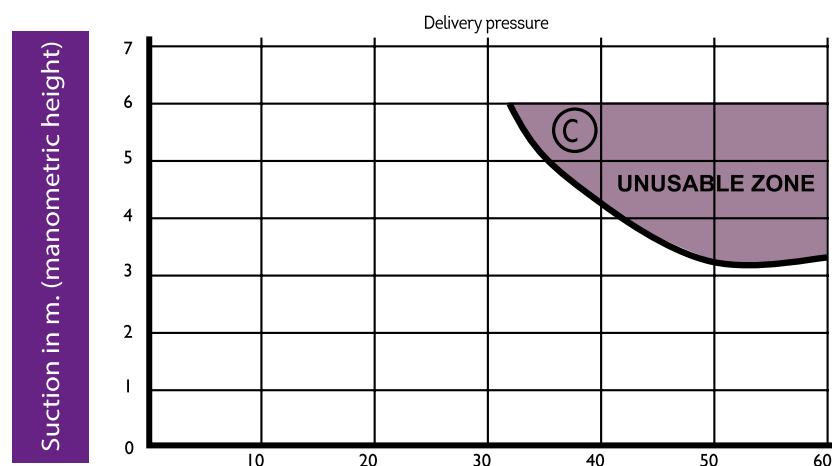

Light Oil { kinematic viscosity =  $\nu_{37} \sim 4$  c St. Total Length Meter  
density =  $\gamma \sim 15,0841$  kg/l

### Unusable zone

© ■ GP-300, GP-500, GP-800 und GP-1.500



C/Invierno, 4-6 28500  
Arganda del Rey, Madrid (Spain)  
Telf.: (+34) 918 719 294  
info@inprord.com  
www.inprord.com



63457 Hanau - Voltastr, 10  
Deutschland (Germany)  
Telf.: (+49) 06181/9587-0  
info@simka.de  
www.simka.de